


FEEDTECH ROLLER MILLS

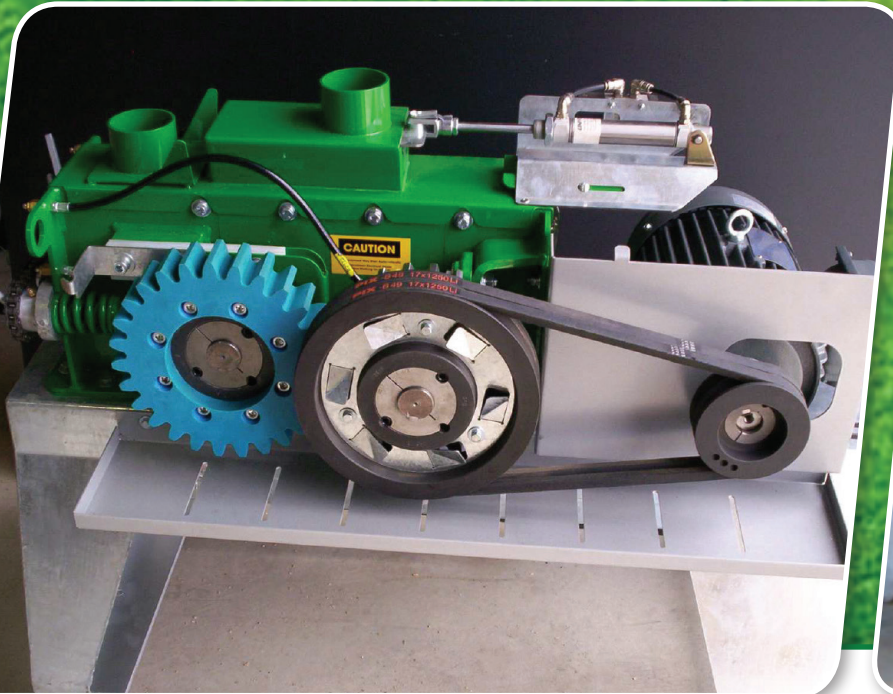

**Feedtech offer
a range of roller
mills to suit most
feeding systems.**

FEATURES:

Fully automatic and manually operated roller mills are available in three sizes:

- 4" (Rolls 4" W x 8" Diam.) Capacity = 2.00 Tonne per hour
- 6" (Rolls 6" W x 8" Diam.) Capacity = 3.50 Tonne per hour
- 8" (Rolls 8" W x 8" Diam.) Capacity = 4.50 Tonne per hour

Note: Specified roller mill capacity can vary according to type and condition of grain.

FEATURES:

- 3hp Electric Motor (4" Mills)
- 5hp Electric Motor (6" Mills)
- 10hp Electric Motor (8" Mills)
- Solid rollers
- Belt & Gear drive combination
- Magnetic protection of rollers
- Spring loaded roller overrides
- Robust M/S construction
- Quick and simple adjustment of rollers
- Fully guarded, preventing accidental access to moving parts
- Lowline design to fit underneath most silos
- Remote lubrication of bearings

OPTIONS:

- Fully automatic digital controller - suited to in line applications (grain flow is actuated and shut off automatically on demand-motor shuts down on a variable timer delay)
- Manual control - manual start/manual stop
- Pneumatic actuation (in lieu of Vacuum)
- Three phase or single phase
- Overhead hopper & frame available
- 12 Month Warranty
- Australian Made



www.feedtech.com.au

(03) 5824 1466 • sales@treveng.com.au